



# HEALTH AND SAFETY ASSESSMENT REPORT

Wheelhouse Solar  
60 MW<sub>AC</sub> Photovoltaic Facility  
Lunenburg County, VA

## ABSTRACT

This is an assessment to address the potential health and safety impacts of the proposed 60 MW<sub>AC</sub> Wheelhouse Solar photovoltaic facility in Lunenburg County, VA. The assessment evaluates potential positive and negative impacts on public health and safety by considering the project design, equipment specifications, and operations. The conclusion of the assessment is that the Wheelhouse Solar project will not create negative health and safety impacts. The clean electricity the project will produce will help to reduce the burning of fossil fuels, which will reduce pollution from those sources and provide millions of dollars' worth of local public health benefits as a result.

**Tommy Cleveland, PE**

Consulting Engineer  
Solar Health and Safety Expert  
September 5, 2022



## Executive Summary

This report assesses the potential health and safety impacts of the proposed Wheelhouse Solar 60 MW<sub>AC</sub> project. The Wheelhouse facility, located in Lunenburg County, Virginia, will install crystalline silicon solar panels on single-axis tracking racks that slowly rotate each row of panels to follow the sun across the sky. Large central station inverters will convert the DC solar electricity generated by the solar panels into grid-synched AC electricity. Step-up transformers will boost the voltage for connection to an onsite substation that connects to a Dominion transmission power line that bisects the site.

Photovoltaic panels are not new. They have been used and studied for over 40 years and are well understood by the scientific community. Utility-scale solar facilities are newer, but they too have been installed and studied for over a decade, and scientists also have a clear understanding of their function and impacts.



Photovoltaic systems produce emission-free electricity. This replaces electricity production from fossil fuel power plants that do produce harmful emissions. The health benefits of clean solar electricity are hard to put a dollar figure on, but the EPA's best attempt at doing just that puts the value in the mid-Atlantic US between 3.1 and 7.0 cents per kWh produced by utility scale solar. Even at the bottom end of this range, for **the Wheelhouse Solar project this equates to \$4.0 million of public health benefit per year, and \$120 million in 30 years.**

The only risks to health and safety of the Wheelhouse Solar project are not unique to solar but exist for any source or use of electricity. These are electric shock, arc flash, and fire. Due to world-class safety regulations in the U.S. and an experienced solar industry, these risks are extremely low, and the secure and isolated nature of ground-mounted PV facilities, including Wheelhouse Solar, results in negligible risk to the general public.

Common concerns about toxicity and EMF from solar facilities are understandable, but the operating characteristics and materials present in the equipment means that neither toxicity nor EMF pose a material risk to public health or safety. Research and experience regarding heat island effect shows that, like other utility-scale PV projects, the Wheelhouse Solar project will not create either of these impacts. The single-axis trackers at Wheelhouse Solar that will keep the panels facing in the direction of the sun minimizes the potential for the project to create any glare. Additionally, there is only one airport in the vicinity of Wheelhouse Solar, Lunenburg County Airport, which is about 5 miles east of the site. This is a very small airport without an air traffic control tower. So, there is no chance of glare from the solar site causing a hazard to aviation.

When the solar panels reach the end of their useful life, likely in 30 to 40 years, they will be removed from the site and disposed of in conformance with federal, state, and local requirements, which could mean recycling or disposal in a landfill. Today the main constituents of the solar panels, and the other equipment such as racking and transformers, can be recycled in the existing recycling infrastructure. Technology to recycle nearly all the constituents in solar panels exists today and is expected to be much cheaper and widely available when the solar panels at this project reach the end of their useful life.

Based on my knowledge of engineering and science, personal experience with PV technology, review of academic research, and review of materials provided by the project developers about the proposed Wheelhouse Solar PV facility in Lunenburg County, Virginia, my opinions are summarized as follows:

- The development and operation of the Wheelhouse Solar facility will not result in any environmental contamination or negative impacts to public health or safety.
- The Wheelhouse Solar facility will not increase the temperature of the area surrounding the site.
- The Wheelhouse Solar facility is not expected to create any glare hazard for aviation or other negative glare impacts.

## Introduction

### Purpose:

This report assesses the potential health and safety impacts of the proposed Wheelhouse Solar (“Wheelhouse”) 60 MW<sub>AC</sub> project. It also seeks to educate readers on the health and safety impacts of photovoltaic systems using accurate scientific sources of information.

### Overview of Potential Impacts:

The proposed solar photovoltaic (PV) system is likely to remain in operation at least 30 years, and this report considers its potential impacts in Lunenburg County from the start of construction onward, including decommissioning of the project and restoration of the land. This assessment considers all aspects of the project but focuses on those unique to solar projects.

#### *Potential Positive Health and Safety Impacts:*

Every utility-scale PV project creates a significant reduction in pollution because it produces emission-free electricity that replaces electricity that otherwise would have been largely produced by burning coal and natural gas. Burning these fossil fuels for electricity production is a significant source of air, water, and soil pollution, so reducing their use is a clear public health benefit.

The US Environmental Protection Agency (EPA) conducted a study to determine how much pollution PV systems save and to estimate the public health value of the cleaner air, water, and soil they provide. These experts calculated that based on the sunshine available, the way electricity is produced, and the public health impacts of fossil fuel-fired electricity, every kilowatt-hour (kWh) of electricity produced by utility scale solar in the mid-Atlantic provides 3.1 to 7.0 cents of public health benefit.<sup>1</sup> At this rate of benefit, **the Wheelhouse Solar project will produce \$4.0-\$9.0 million of public health benefits every year**, which could add up to \$120-\$270 million over the life of the project. The public health benefits of generating pollution-free electricity with PV are very significant.

The positive benefits of photovoltaics are widely understood and well documented, so this report will not address them further. Furthermore, the positive public health impacts of the Wheelhouse Solar project significantly outweigh any health and safety risks as described below.

#### *Potential Negative Health and Safety Impacts:*

While PV facilities, as electricity generating facilities, in general provide some potential for negative health and safety impacts, the Wheelhouse Solar project does not present any negative health and safety risks specific to its location or technology choice. The only aspect of PV systems that presents risk of physical harm is the potential for electrical shock, arc flash, or fire, which are hazards present with any electrical system and not unique to solar. There are several other aspects of PV systems that often raise public health and safety concerns, but no other aspect of PV systems poses more than an insignificant risk of negative public health or safety impacts.

The review and permitting process Virginia requires for utility-scale solar projects provides some certainty that the proposed project will not cause significant environmental or health impacts. The Virginia Department of Environmental Quality (DEQ) coordinates reviews from the Department of Historic Resources, the Department of Wildlife Resources, and the Department of Conservation and Recreation to ensure potential significant impacts to cultural or threatened and endangered species are avoided or mitigated. These reviews ensure the project complies with state regulations for small renewable energy projects (up to 150 MW).<sup>2</sup> The site is not authorized to begin construction until DEQ completes this review and provides authorization. Additionally, the project must comply with all other applicable local, state, and federal

---

<sup>1</sup> US Environmental Protection Agency, Public Health Benefits-per-kWh of Energy Efficiency and Renewable Energy in the United States: A Technical Report. 2<sup>nd</sup> Ed, May 2021, [www.epa.gov/statelocalenergy/public-health-benefits-kwh-energy-efficiency-and-renewable-energy-united-states](http://www.epa.gov/statelocalenergy/public-health-benefits-kwh-energy-efficiency-and-renewable-energy-united-states)

<sup>2</sup> Solar Permit By Rule (9VAC15-60), Chapter 60. Small Renewable Energy Projects (Solar) Permit by Rule, <https://law.lis.virginia.gov/admincode/title9/agency15/chapter60/>

---



statutes and regulations, including but not limited to, strict adherence to applicable state and local erosion and sediment control/storm water management laws.

This report will address all the potential health and/or safety risks of the Wheelhouse Solar project, including common concerns that have no potential for public health impact. Specifically, this report addresses the following possible negative impacts/concerns:

- Electrical Shock and Arc Flash
- Fire and Emergency Response
- Toxicity
- Electromagnetic Fields (EMF)
- Heat Island Effect
- Glare

Wheelhouse Solar will include a 200 ft setback from neighboring property, most of which consists of existing trees. Where existing vegetation does not exist, a 50-ft-wide vegetative buffer sufficient to mitigate the visual impact of the facility will be planted and maintained. This is a large setback buffer compared to many solar facilities and most other land uses, and the extensive vegetative screening is very uncommon around existing solar facilities and many other land uses. This combination of significant setback and thick vegetative screening will separate the public from this project and minimize its impacts, including the visual/aesthetic impact of seeing the equipment.

Before addressing each of the above impact categories, this report provides an overview of utility-scale photovoltaics equipment, facility construction, and operations.

## Utility-Scale PV Equipment, Construction, and Operations<sup>3</sup>

To understand the potential impacts of a utility-scale PV system it is helpful to understand the components of the facility, as well as how a facility is constructed and maintained. The components and practices in this overview are typical of the industry and representative of the proposed Wheelhouse Solar project. The initial site work occurs first, but the order of the other construction steps is flexible and may occur concurrently.

**Initial Site Work** (construction entrance/driveway, sedimentation and erosion control installation, clearing and grubbing, potentially some grading, perimeter fence, and internal roads)



<sup>3</sup> Photo sources: author, ncre-usa.com, NC DEQ, blueoakenergy.com, solarbuildermag.com, hbc-inc.com, solarprofessional.com, ccrenew.com, and landiscontracting.com



## Underground Work (trenching for wires from PV combiner boxes to inverters, inverter pad installation, medium voltage cables to interconnection equipment)



## PV Panel Structure/Racking (driving of steel piles, installation of racking "tables", installation of PV panels)



## Electrical Work (connection of PV module wiring, combiner boxes, inverters, transformers, interconnection facilities)





## Establishment of Ground Cover (required to close out sedimentation and erosion control permit)



## Operations and Maintenance (24/7 monitoring, vegetation maintenance, preventative maintenance)



## Electrical Shock and Arc Flash

Any electricity over 50 volts presents an electrical shock hazard, including the electricity in PV facilities. However, like electrical systems in buildings, the solar facility must adhere to the National Electrical Code (NEC) and the equipment must be certified to the appropriate UL safety standards.

Unlike buildings, members of the public are restricted from entering a utility-scale solar facility. To help ensure that only qualified people have access to the equipment, the NEC requires a perimeter security fence with electrical warning signs. The lack of public access coupled with the high U.S. electrical safety standards greatly reduces the risk of electric shock for the public.

In circuits with significant available fault current there is another electrical hazard, called arc flash, which is an explosion of energy that can occur due to a short circuit. This explosive release of energy causes a flash of light and heat, and creates a shockwave that can knock someone off their feet. The risk of arc flash in a solar facility is no different than the risk at commercial or industrial buildings, except that solar facilities are much less accessible. Equipment with an arc flash risk require arc flash warning labels, and only trained personnel wearing the proper personal protective equipment are allowed to work on it. Due to the secure perimeter and the high U.S. electrical safety standards, there is extremely low arc flash risk to the public.



Figure 1. Perimeter Fence with Warning Signs

## Fire and Emergency Response

Every electrical system has some risk of starting a fire, including electrical systems in residential, commercial, and industrial buildings. It is this hazard that motivated creation of the National Electrical Code over 100 years ago. Due to the high standard required by the NEC, modern electrical systems rarely start fires. Like electrical systems in buildings, photovoltaic systems must also adhere to the NEC. In the rare case that a PV system has a fault that starts a fire, there is very little combustible material present for it to ignite. The only flammable portions of PV panels are the few thin plastic layers, the plastic junction box, and the insulation on its wires.

Heat from a small flame is not adequate to ignite a PV panel, but an intense fire or an electrical fault can ignite a PV panel. One real-world example illustrating the low flammability of PV panels occurred during July 2015 in an arid area of California. Three acres of grass under a utility-scale PV facility burned without igniting the panels mounted just above the grass.<sup>4</sup> Another example occurred recently in Florida, where there was a 5-acre grass fire under a portion of a 400-acre PV facility that did not ignite any modules.<sup>5</sup>

The most significant fire hazard at a utility-scale solar facility may be the oil in the transformers. There are medium voltage transformers dispersed throughout the site located by each inverter, and there is a large transformer in the interconnection substation. Traditionally these types of transformers have been filled with a mineral oil, which is derived from petroleum. The mineral oil is electrically insulating but flammable. These transformers are similar to transformers found throughout every community; at shopping centers, schools, factories, neighborhoods, etc. There are best practices for how to prepare for and conduct an emergency response at a transformer. For example, see the NERC “Lessons Learned” document in the Sources for Further Reading at the end of this section.

No special equipment is required to respond to a fire incident at a utility-scale PV facility. The most important thing for first responders to know is that as long as the sun is shining on the PV panels they will produce dangerous voltage, but there is no danger in touching undamaged panels. There are multiple electrical disconnect switches in PV systems which allows problem areas to be electrically isolated quickly.

Risks of fire associated with ground cover and perimeter vegetation are reduced by landscaping plans that are developed with this specific goal. Local emergency responders will have 24/7 access to the facility via a lock box or key. First responders can safely extinguish grass fires inside of the facility, or monitor and protect the areas surrounding the facility, to ensure the fire does not spread to surrounding areas. The solar facility owner remotely monitors the system around the clock and has personnel available 24/7 for emergencies. The International Association of Fire Fighters (IAFF) provides online training on responding to fires at photovoltaic facilities at [www.iaff.org/solar-pv-safety](http://www.iaff.org/solar-pv-safety).

### *Sources for Further Reading on Fire and Emergency Response:*

- Duke Energy: [Fire Safety Guidelines for Rooftop- and Ground-Mounted Solar Photovoltaic \(PV\) Systems](#), September 2015
- North American Electric Reliability Corporation (NERC): [Lessons Learned, Substation Fires: Working with First Responders](#), February 2019

---

<sup>4</sup> Matt Fountain. The Tribune. Fire breaks out at Topaz Solar Farm. July 2015. [www.sanluisobispo.com/news/local/article39055539.html](http://www.sanluisobispo.com/news/local/article39055539.html)

<sup>5</sup> WBMM News 13, Fire breaks out at Jackson Co. solar farm. August 2022, [www.youtube.com/watch?v=byE\\_BpUX2mc](https://www.youtube.com/watch?v=byE_BpUX2mc)

---



## Toxicity (Equipment and Operations)

Toxicity is probably the most common health and safety concern about photovoltaic systems members of the public may have, although as detailed below the systems do not pose a material toxicity risk to the public or the environment. This report examines all possible sources of toxicity, from site construction to decommissioning at the end of the project life. The potential sources of toxicity are organized into two categories: equipment and operations and maintenance (O&M).

### Toxicity: Equipment

The main equipment installed at a solar facility includes photovoltaic modules (a.k.a. solar panels or PV panels), metal structures for mounting the solar panels, and wiring to collect the electricity they produce. The other major components are inverters and transformers. Inverters are enclosed power electronic equipment that do not contain liquids and are treated like other electronic waste at the end of their life. Transformers contain non-toxic mineral or vegetable oil and are no different than the typical transformers outside of most schools and shopping centers. Solar panels have raised the most public concerns related to toxicity, so they are the only component addressed in this section.

#### Contents of PV Panels

The Wheelhouse Solar project will use crystalline silicon PV panels from a Bloomberg Tier 1 manufacturer<sup>6</sup>. The PV panels are the most expensive and most important component in a solar facility, so the project owner performs industry-standard due diligence to ensure that the panels selected and delivered to the project are properly manufactured, certified, and tested.

The diagram below shows the components of a typical silicon PV panel, including a closeup of the solar cells and the electrical connections. Over 80% of the weight of a PV panel is the tempered glass cover (or, front and back heat-strengthened glass) and the structural aluminum frame, which work together to create a strong, durable panel that outlasts its 30-year performance warranty. The encapsulation films are clear plastic lamination layers that protect the cells and electrical contacts from moisture for the life of the panel. These layers also maintain the panel as a single unit in the event of breakage of the glass cover(s), similar to the film in auto windshields that keeps them from fragmenting if the windshield shatters.

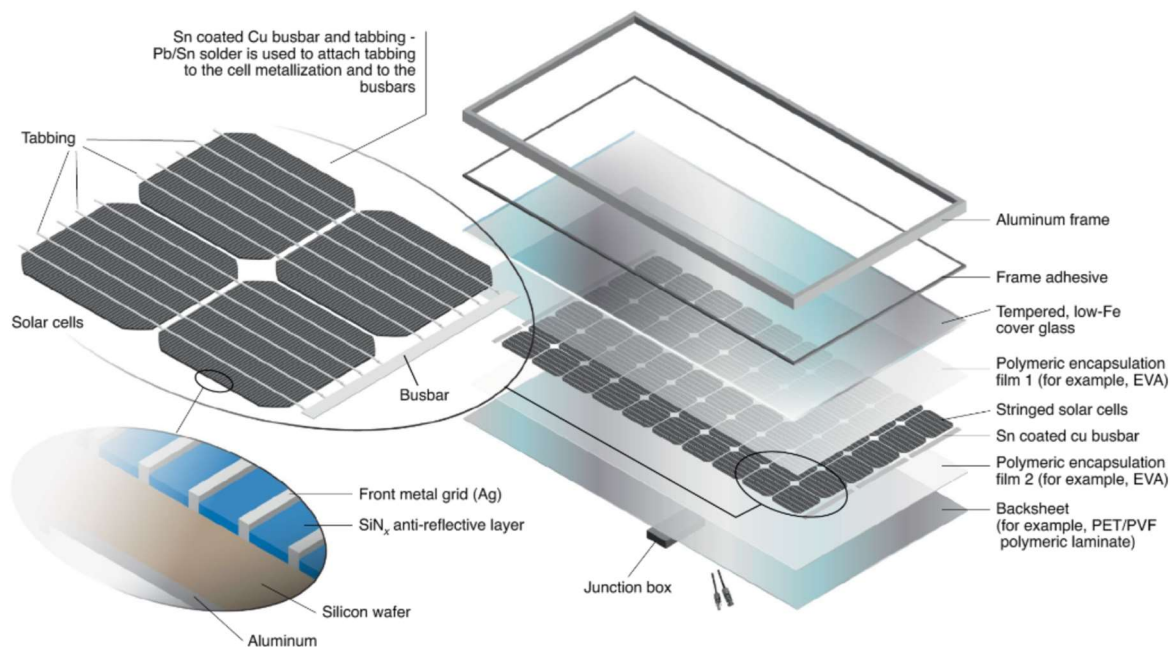


Figure 2. Contents of Framed Crystalline Silicon Panels (Source: NREL)

<sup>6</sup> The financial information firm Bloomberg has developed a tiering system for PV module makers based on bankability that is the standard the PV industry uses to differentiate between the hundreds of manufacturers of solar modules on the market. Tier 1 is the highest of three tiers, which are determined by banks' confidence in a manufacturer's PV panels as demonstrated by their willingness to supply project financing backed only by the assets of the project. The details are described by BloombergNEF in this document: PV Module Tier 1 List Methodology [https://data.bloomberglp.com/bnef/sites/4/2012/12/bnef\\_2012-12-03\\_PVModuleTiering.pdf](https://data.bloomberglp.com/bnef/sites/4/2012/12/bnef_2012-12-03_PVModuleTiering.pdf)

As can be seen in the above diagram, there are no liquids to leak from a broken panel. The plastic layers are inert. The silicon PV cells are nearly 100% silicon, which is harmless and is the second most common element in the Earth's crust. The only components of a PV panel that have any potential of toxic impact is the solder used to connect the solar cells together and to the busbars at the end of the panel, and the thin strips of silver that collect electricity from each cell.<sup>7</sup> The solder, which is the same tin-lead solder standard in the electronic industry, is 36% lead. The tiny amount of silver in a panel does not create a toxicity hazard, but it does add potential recycling value.

Even though there is only a tiny amount of lead in each panel, the total amount of lead in all the PV modules in a utility-scale project adds up to a considerable amount of lead. However, these PV panels are spread out over a large area and when the amount of lead in the PV panels is compared to the amount of lead naturally occurring in the soil under the PV array, it is obvious that even if all the lead somehow leached out of every module (which as explained below is impossible), the increase in total lead in the soil would be less than the naturally occurring difference between different soils. Across the US soils naturally have between about 10 and 50 mg of lead per kg of soil, with the average being somewhere in the 20s. Across the 66 USGA survey locations in VA, the values ranged from 7.7 to 153 with an average of 27 and a median of 21.<sup>8</sup> For a location that naturally has 20 mg of lead per kg of soil, all the lead in all the PV modules in the facility would have the same amount of lead as just the top 2.5 inches of soil at the site!<sup>9</sup>

### Broken PV Panels

There is zero risk of toxicity escape from undamaged PV panels because any lead is sealed from air and water exposure. Individual panels damaged during the life of the solar facility are identified in days to months through either remote monitoring of system performance or from visual inspections during maintenance by onsite staff. Recently an international team of experts conducted an International Energy Agency - Photovoltaic Power Systems Programme (IEA-PVPS) study to assess if there is a public health hazard caused by lead leaching from the broken PV panels during the life of a utility-scale solar facility utilizing conservative assumptions to evaluate extreme scenarios.<sup>10</sup> The study examined worst-case exposure routes of soil, air, and ground water for a typical 100 MW<sub>AC</sub> PV facility. For example, the worst-case residential groundwater exposure assumed that all broken panels from the entire array were within 25 feet of the groundwater well, and the chemicals released from every broken panel transported to the same groundwater well. The study found that worst-case lead exposure via air, soil, and water were each orders of magnitude less than the maximum safe levels defined by the US



Figure 3. Close-up photo of impact point that broke the glass front of this PV panel

Environmental Protection Agency (EPA) to have no adverse health effects. In the case of water, the health-screening level is the same as the maximum concentration level (MCL) set by the EPA for water quality in public water systems. This study demonstrates that there is no risk to public health from lead leached from broken PV panels.

<sup>7</sup> A detailed bill of materials for crystalline silicon PV modules is provided in Table 2 of the International Energy Agency (IEA) PVPS's report entitled: Life Cycle Inventories and Life Cycle Assessments of Photovoltaic Systems, December 2020 <https://iea-pvps.org/wp-content/uploads/2020/12/IEA-PVPS-LCI-report-2020.pdf>

<sup>8</sup> Smith, D.B., Cannon, W.F., Woodruff, L.G., Solano, Federico, Kilburn, J.E., and Fey, D.L., 2013, Geochemical and Mineralogical Data for Soils of the Conterminous United States: U.S. Geological Survey Data Series 801, 19 p., <http://pubs.usgs.gov/ds/801/>

<sup>9</sup> PV: 12 g of lead (per panel) per 65 ft<sup>2</sup> (panel footprint of 21.5 ft<sup>2</sup> / ground coverage ratio of 0.33) = 0.185 g of lead/ft<sup>2</sup>

Soil: 20 mg of lead per kg of soil \* 45 kg of soil per ft<sup>3</sup> \* 2.5 inches (0.208 ft) soil depth \* 65 ft<sup>2</sup> = 12.17 g of lead / 65 ft<sup>2</sup> = 0.187 g of lead/ft<sup>2</sup>

<sup>10</sup> P. Sinha, G. Heath, A. Wade, K. Komoto, 2019, Human health risk assessment methods for PV, Part 2: Breakage risks, International Energy Agency (IEA) PVPS Task 12, Report T12-15:2019. ISBN 978-3-906042-87-9, September 2019



## GenX and PFAS

Following the discovery that a chemical plant near Fayetteville, NC had been dumping the unregulated chemical known as GenX into the Cape Fear River for many years, some solar opponents raised questions about the possibility of GenX or other PFAS chemicals being emitted by solar panels. PFAS chemicals are a group of chemicals informally known as “forever chemicals” due to their durability in the environment. These chemicals are found in many products, including food packaging materials, firefighting foam, and stain resistant carpet treatments. The author has not found any evidence for the existence of PFAS in PV panels, and a fact sheet from the University of Michigan entitled “Facts about solar panels: PFAS contamination” explains that PV panels do not contain PFAS and thus do not produce any PFAS contamination.<sup>11</sup>

## PV Panel End-of-Life

PV panels last a very long time, but they do not last forever. Their output declines slightly each year, but panels rarely fail in less than 40 years. The expected economic life of utility-scale PV panels is 25-40 years, at which point they may be replaced by new panels, or the entire project may be decommissioned, returning the land back to how it was before the solar facility was installed. In both instances, the original PV panels are removed from the site. At a typical solar facility, there are three possible fates for solar panels at the end of their economic life at a project, described below. The Ordinance for Solar Energy Facilities in Lunenburg County requires that the facility owners handle and dispose of the equipment and other facility components in conformance with federal, state, and local requirements. To help assure that the project is fully decommissioned at the appropriate time, without putting any cost burden on the landowners or the county, the project will post decommissioning surety.

- **Reuse:** It is most likely that when the PV panels at the Wheelhouse Solar project are decommissioned, they will still produce approximately 80% of their original output and have another decade of productive life, making them viable to be reused as solar panels on rooftops or ground-mounted applications.
- **Recycling:** Any panels that are not reused as working panels could be recycled. Currently in the US it is possible to recycle the largest constituents of PV panels using the existing glass and metal recycling infrastructure. Today this recycling comes at a cost premium to disposing the panels in a landfill. However, as PV recycling technology improves and the number of panels reaching end-of-life increases dramatically, it is possible that in the future recycling PV panels will more than pay for itself. Recycling plants built specifically to recycle PV panels can recycle nearly 100% of the panel, including the valuable silver and refined silicon they contain, and can be optimized for the task, significantly reducing the cost to recycle each panel. Currently only one PV-specific recycling plant has been built, in France, but in the coming decades it is expected that PV-specific recycling plants will become commonplace. PV recycling technology is clearly still in its infancy. However, it is expected that when the Wheelhouse Solar PV panels reach the end of their useful life in 30+ years, the US PV recycling infrastructure will be robust, such that reuse or recycling of the PV panels will be the preferred options or required by new U.S. regulations, as it has been for years in Europe.



Figure 4. PV Panels Waiting to be Recycled (Source: LuxChemtech GmbH)

The Solar Energy Industries Association (SEIA) started the SEIA National PV Recycling Program several years ago at accelerate PV recycling in the US. Currently the program aggregates the services offered by recycling vendors and PV manufacturers, making it easier for the industry to select a cost-effective and environmentally responsible end-of-life management solution. **The program identifies Preferred Recycling Partners through an evaluation process. These partners are capable of recycling PV modules, inverters, and other related equipment today.** The current SEIA PV Recycling Partners are listed on the program’s website, and full access to the program and the Preferred Recycling Partners is available to SEIA members.

<sup>11</sup> “Clean Energy in Michigan” Series, Number 12, Facts about solar panels: PFAS contamination, By Dr. Annick Ancil, <https://graham.umich.edu/media/pubs/Facts-about-solar-panels--PFAS-contamination-47485.pdf>

- **Disposal:** For most solar facilities, if panels are not reused or recycled, federal waste management laws (Resource Recovery and Conservation Act, RCRA) require that PV panels, like any other commercial/industrial waste, be disposed of properly, which is typically in a landfill. In order to determine the proper disposal method, RCRA requires that all commercial/industrial waste be identified as either hazardous or non-hazardous waste, which is generally determined using the Toxic Characteristic Leaching Procedure (TCLP) test developed by the U.S. EPA. This test seeks to simulate landfill conditions and check for leaching of 8 toxic metals and 32 organic compounds. Little data has been published about the TCLP test results of solar panels, but it is known that some older silicon panels that contain more lead than modern panels exceed the TCLP test limits for lead. Researchers at Arizona State University's Photovoltaic Reliability Laboratory have done the most robust investigation of methods for conducting accurate TCLP tests on PV panels, and their latest research found that all three of the crystalline silicon PV panels tested passed the TCLP test, classifying them as non-hazardous waste.<sup>12</sup>

A worst-case scenario would be tons of PV panels being disposed of in a non-sanitary landfill, which is essentially a huge pile of garbage with little to no effort to minimize leaching from the waste that is illegal in many world regions, including in Virginia. A recent IEA-PVS research study on PV panels disposal risks used this worst-case situation to evaluate the potential for cancer and non-cancer hazards through comparison of predicted exposure-point concentrations in soil, air, groundwater, and surface water with risk-based screening levels created by the EPA and the World Health Organization (WHO).<sup>13</sup> One of the report's authors, Gavin Heath with the US Department of Energy's National Renewable Energy Laboratory (NREL), summarized their findings about lead in silicon PV panels this way: "under the worst-case conditions, none of them exceeded health-screening thresholds, meaning they're not deemed to potentially have significant enough risk that you'd want to do a more detailed health risk assessment."<sup>14</sup> The worst-case scenario defined in the research has many conservative assumptions, and thus likely overestimates the risk of disposal in a *non-sanitary* landfill. It is important to stress that Virginia only allows solid waste disposal in sanitary landfills, which are engineered facilities with plastic liners, leachate collection systems, and covers, all of which dramatically reduce the potential for human exposure compared to non-sanitary landfills. This and other research show that if the Wheelhouse Solar PV panels are disposed of in a landfill, they will not create any negative public health impact.

In 2019 the North Carolina legislature passed HB 329 (S.L. 2019-132), requiring the NC Department of Environmental Quality (DEQ) to prepare a report to guide rulemaking regarding decommissioning of solar PV and other renewable energy facilities and proper disposal of their equipment. While the policy recommendations in the report do not apply to Virginia, the report, issued January 1, 2021 and titled *Final Report on the Activities Conducted to Establish a Regulatory Program for the Management and Decommissioning of Renewable Energy Equipment*, provides a thorough discussion addressing many questions landowners and communities may have about solar decommissioning that are applicable in Virginia. NC DEQ compiled the input and commentary of numerous stakeholders, including the renewable energy industry, environmental organizations, and academia, including the author and NC State University's Clean Energy Technology Center. The report is well researched and very informative. NC DEQ provides several key findings and recommendations, but no recommendations for changes in NC regulations of solar facilities. One of the report's key findings is that "According to Division of Waste Management experts, if every end-of-life PV module is disposed of in landfills, landfill capacities will not be negatively impacted."

## Transformer Oil

While PV modules and inverters do not have any liquids that could leak into the environment, the generator step-up (GSU) transformer in the substation and the inverter step-up (ISU) transformers located with each inverter do contain oil. Several types of oil can be used in transformers to provide the needed electrical insulation and cooling, but the most common type of transformer oil is mineral oil, which has been used in transformers since transformers were first manufactured in the 1890s.

---

<sup>12</sup> Tamizhmani, G., et al. (2019). Assessing Variability in Toxicity Testing of PV Modules. In 2019 IEEE 46th Photovoltaic Specialists Conference (pp. 2475-2481). Institute of Electrical and Electronics Engineers Inc.. <https://doi.org/10.1109/PVSC40753.2019.8980781>  
Publicly-accessible version: [https://dev-pvrelability.ws.asu.edu/sites/default/files/93\\_assessing\\_variability\\_in\\_toxicity\\_testing\\_of\\_pv\\_modules.pdf](https://dev-pvrelability.ws.asu.edu/sites/default/files/93_assessing_variability_in_toxicity_testing_of_pv_modules.pdf)

<sup>13</sup> P. Sinha, G. Heath, A. Wade, K. Komoto, Human health risk assessment methods for PV, Part 3: Module disposal risks, International Energy Agency (IEA) PVPS Task 12, Report T12-16:2020. ISBN 978-3-906042-96-1, May 2020

<sup>14</sup> Green Tech Media, Landfilling Old Solar Panels Likely Safe for Humans, New Research Suggests, April 2020, [www.greentechmedia.com/articles/read/solar-panel-landfill-deemed-safe-as-recycling-options-grow](http://www.greentechmedia.com/articles/read/solar-panel-landfill-deemed-safe-as-recycling-options-grow)



Due to the large volume of oil contained in a GSU transformer, they are installed with a secondary containment structure under them to contain any oil leaked or spilled. The smaller ISU transformers are approximately the same size as the transformers located throughout every community; behind schools, shopping centers, apartments, etc., and they typically do not provide secondary containment. However, ongoing monitoring of transformer temperature and pressure, and regular preventative maintenance, is likely to find the rare leak when it is still small before it has a chance to leak much oil.

There was a time when most transformer oil was toxic. From 1929 to 1977 polychlorinated biphenyls (PCBs), a man-made alternative to mineral oil, was commonly used as transformer oil instead of mineral oil. However, the toxicity of PCBs was eventually understood, leading to PCBs being banned in the US in 1979. Today, transformers either use mineral oil or vegetable oil, both of which are free of PCBs. Mineral oil is non-toxic to humans, in fact “baby oil” that is used to soothe babies’ skin is a scented mineral oil. Although non-toxic to humans, mineral oil is an environmental contaminant and is harmful to aquatic ecosystems, so releases to the environment are avoided. The potential for negative environmental impact from spilled vegetable oil is much less because these oils are biodegradable, so the time they impact the environment is short-lived. Federal regulations dating back to the Clean Water Act of 1973 require facilities with significant quantities of oil to prevent pollution of water.<sup>15</sup> The current EPA regulations require that facilities with over 1,320 gallons oil, and with the potential for spilled oil to impact surface water, must develop and implement an oil spill prevention, control and countermeasure (SPCC) plan. While the risk of negative environmental impact from a transformer oil spill/leak cannot be eliminated entirely, these regulations along with standard industry practices, result in a low probability for a substantial spill and a high probability for a quick clean-up response to minimize impact if a spill were to ever occur.



Figure 5. GSU Transformer with Secondary Containment to Capture any Leaked Oil

## Toxicity: Operations & Maintenance

Unlike most other electricity generation facilities, photovoltaic systems do not produce any emissions. The only way they could produce emissions is in the case of a fire. The potential human health impacts from contact with smoke from burning PV panels was studied by the International Energy Agency (IEA) PVPS in their first report on human health risk assessment. In that study they did not study ground-mounted PV, presumably because of the extremely low risk of significant fire, but they did investigate the potential health impacts of lead in silicon modules dispersing in smoke from a fire in a building that is covered in PV modules. The study considered several worst-case scenarios for different size buildings and different environments and found no risk of harmful health impacts from the smoke from PV panels.<sup>16</sup>

The only other two aspects of operations and maintenance (O&M) that have raised concerns about toxicity are the fluids used to wash panels and herbicides used to maintain vegetation.

- **Panel Washing** – Across VA there is ample rain to keep the panels clean. If the panels need to be washed, it would occur infrequently and typically with use of deionized water and cleaning brushes.
- **Herbicides** – The industry standard practice for maintaining the vegetation at solar facilities is similar to how most cities maintain their parks, which is they primarily rely on mowing and string trimmers for vegetation and use herbicides along fences, on roads, and under some equipment. Parks and solar facilities also use herbicides to strategically remove problem weeds, especially woody weeds, to maintain a healthy cover of the desired species of grasses and other low-growing vegetation. This mode of herbicide use applies significantly less than the herbicide volume commonly applied in NC agriculture. For example, Round-Up-Ready crops are common row crops that have been engineered for the entire field to be sprayed with Round-Up (glyphosate) several times each season. Additionally, farmers applying most types of

<sup>15</sup> Environmental Protection Agency, webpage: Overview of the Spill Prevention, Control, and Countermeasure (SPCC) Regulation, [www.epa.gov/oil-spills-prevention-and-preparedness-regulations/overview-spill-prevention-control-and](https://www.epa.gov/oil-spills-prevention-and-preparedness-regulations/overview-spill-prevention-control-and)

<sup>16</sup> P. Sinha, G. Heath, A. Wade, K. Komoto, 2018, Human Health Risk Assessment Methods for PV, Part 1: Fire risks, International Energy Agency (IEA) PVPS Task 12, Report T12-14:2018, [https://iea-pvps.org/wp-content/uploads/2020/01/HHRA\\_Methods\\_for\\_PV\\_Part1\\_by\\_Task\\_12.pdf](https://iea-pvps.org/wp-content/uploads/2020/01/HHRA_Methods_for_PV_Part1_by_Task_12.pdf)

herbicides to their fields are not required to be certified or licensed, but a NC commercial pesticide applicators license is required to apply any herbicide to a solar facility.

### *Sources for Further Reading on Toxicity:*

- International Renewable Energy Agency (IRENA): [End-of-life management: Solar Photovoltaic Panels](#), June 2016
- Electric Power Research Institute (EPRI): [Solar PV Module End of Life: Options and Knowledge Gaps for Utility-Scale Plants](#), December 2018
- EPRI: [Feasibility Study on Photovoltaic Module Recycling in the United States](#), April 2018
- EPRI: [Solar Photovoltaics: End-of-Life Management Infographic](#), March 2021
- National Renewable Energy Laboratory (NREL): [A Circular Economy for Solar Photovoltaic System Materials](#), April 2021
- Solar Energy Industries Association (SEIA): [SEIA National PV Recycling Program](#), with factsheet, checklist, and peer-reviewed article, (accessed December 2021)
- North Carolina Department of Environmental Quality: [Final Report on the Activities Conducted to Establish a Regulatory Program for the Management and Decommissioning of Renewable Energy Equipment](#), January 2021

## Electromagnetic Fields (EMF)

Exposure to EMF, or electric and magnetic fields, is a fact of everyday modern life. Electromagnetic fields come in many different frequencies, ranging from grid electricity with a frequency of 60 hertz to x-rays and gamma rays that are billions of billions of times faster. The faster the frequency the stronger the EMF. The EMF coming from grid electricity, including from the inverters, transformers, and AC wires to be used at the Wheelhouse Solar facility, has a much lower frequency and therefore much lower energy than the EMF from cell phones, wireless internet, and even radio and TV towers. The solar panels and the wire connecting them to the inverters carry direct current electricity, which has a frequency of zero hertz, and thus produces static electric and magnetic fields but no EMF. The voltage and current of these direct current circuits are both relatively low, so the electric and magnetic fields they produce are both rather weak. The static magnetic fields the panels generate are much weaker than the Earth's natural static magnetic field, which can be demonstrated by a compass still pointing north when placed near the panels.

Electric fields are created around wires and equipment wherever a voltage exists, however it is easily blocked with common materials such as metal, wood, and soil. The World Health Organization (WHO) in 2005 concluded that there were no substantive health issues related to electric fields (0 to 100,000 Hz) at levels generally encountered by members of the public.<sup>17</sup> The proposed solar project does not produce any voltages higher than the existing power lines, and therefore does not produce any electric fields not generally encountered by members of the public.

Magnetic fields are the other aspect of EMF, and they are created by electric current. Typical Americans are exposed to about 1 miligauss of magnetic field from grid electricity on average during their day, primarily from sources at homes and work<sup>18</sup>. The primary source of magnetic fields in a solar facility are the inverters and the short section of wires between each central inverter and its step-up transformer. To convert direct current to alternating current, inverters use a series of switches that turn off and on several thousand times a second, creating EMF in the range of 5 kHz to 100 kHz, which is much faster than the 60 Hz of grid electricity but still much slower than even the lowest frequency radio signals. Also, the energy output of inverters has the highest electrical current of any portion of the solar facility, making the few feet of wire between the inverter and the transformer the source for the strongest magnetic fields in the facility, yet because the strength of a magnetic field decreases dramatically with increasing distance from the source, these magnetic fields only extend about 100-

---

<sup>17</sup> WHO factsheet: Electromagnetic fields and public health, Exposure to extremely low frequency fields, June 2007, [www.who.int/teams/environment-climate-change-and-health/radiation-and-health/non-ionizing/exposure-to-extremely-low-frequency-field](http://www.who.int/teams/environment-climate-change-and-health/radiation-and-health/non-ionizing/exposure-to-extremely-low-frequency-field)

<sup>18</sup> World Health Organization (WHO), webpage: Electromagnetic Fields – Typical exposure levels at home and in the environment, [www.who.int/peh-emf/about/WhatIsEMF/en/index3.html](http://www.who.int/peh-emf/about/WhatIsEMF/en/index3.html)



300 feet from the inverter, at which point they measure less than 0.5 milligauss.<sup>19</sup> The inverters at Wheelhouse Solar are generally located several hundred feet inside of the site fence but a few inverters are located as close as about 50 feet to the fence. However, the site has a minimum 200-foot setback from the site perimeter fence to neighboring property lines, so the EMF from the inverters and ISU transformers are not expected to leave the project site. Similarly, the magnetic fields from substations generally do not extend far enough to leave the fence around the substation, so the same can be expected for the Project's substation.<sup>20</sup>

The bottom line is that the EMF from the Wheelhouse Solar PV system will not leave the solar site boundary, and thus will not increase the EMF exposure of any neighbors. Even if some EMF from the PV facility were to extend beyond the fenced perimeter of the site, there would still be no public health impact because low levels of extremely low frequency (ELF) EMF exposure are not harmful to humans. After extensive study of the potential health impacts of EMF from grid electricity the World Health Organization (WHO) concludes:

*"Despite extensive research, to date there is no evidence to conclude that exposure to low level electromagnetic fields is harmful to human health."*<sup>21</sup>

### Sources for Further Reading on EMF:

- Electric Power Research Institute: [EMF and Your Health: 2019 Update](#), December 2019
- World Health Organization: [Electromagnetic Fields](#) (accessed September 2022)

## Heat Island Effect

The localized effects of large-scale PV facilities on temperature and moisture are not yet well understood. However, the localized micro-climate effects of large-scale PV facilities are understood well enough to determine that they do not create a heat island effect similar to the well-documented urban heat island effect from dark, massive, surfaces in urban environments, such as asphalt paved streets and parking lots, that cause urban areas to be significantly warmer than the surrounding rural area during the day and night. The changes that solar panels may make to the way land absorbs, reflects, and emits the energy from sunlight are minimal compared to the changes created by buildings, vehicles, and many miles of concrete and asphalt. By comparison, solar panels absorb and reflect a similar amount of solar energy as vegetation and soil. Solar panels are lightweight and cannot store large amounts of thermal energy, and the ground remains covered in vegetation with its natural exposure to air and water.

Initial research into the potential for PV systems to cause a heat island effect has used a variety of techniques, including conceptual energy flow calculations, advanced fluid dynamic computer simulations, and field measurements of temperature.<sup>22, 23, 24</sup> This research found a range of different effects on temperature, but none indicate that a large PV system could affect the temperature of the surrounding community. Most found that compared to similar undeveloped land the air temperature in a solar facility increases during the day, but the nighttime results were mixed. Some studies found PV sites to be cooler than non-PV sites at night, but others found them to be warmer. Much of this variation is likely explained by the different climates studied but may also be due to the different methods of the studies. Much of the research on solar heat island effect occurred in arid regions of the U.S. southwest where the results are unlikely to translate perfectly to wetter

---

<sup>19</sup> Study of Acoustic and EMF Levels from Solar Photovoltaic Projects. Tech Environmental, Inc., December 2012, [www.co.champaign.il.us/CountyBoard/ZBA/2018/180329\\_Meeting/180329\\_Massachusetts%20Acoustic%20Study%20for%20PV%20Solar%20Projects.pdf](http://www.co.champaign.il.us/CountyBoard/ZBA/2018/180329_Meeting/180329_Massachusetts%20Acoustic%20Study%20for%20PV%20Solar%20Projects.pdf)

<sup>20</sup> [www.niehs.nih.gov/health/materials/electric\\_and\\_magnetic\\_fields\\_associated\\_with\\_the\\_use\\_of\\_electric\\_power\\_questions\\_and\\_answers\\_english\\_508.pdf](http://www.niehs.nih.gov/health/materials/electric_and_magnetic_fields_associated_with_the_use_of_electric_power_questions_and_answers_english_508.pdf)

<sup>21</sup> World Health Organization (WHO), webpage: Electromagnetic Fields – Summary of health effects, [www.who.int/peh-emf/about/WhatIsEMF/en/index1.html](http://www.who.int/peh-emf/about/WhatIsEMF/en/index1.html)

<sup>22</sup> Broadbent, Ashley & Krayenhoff, Eric & Georgescu, Matei & Sailor, David. (2019). The Observed Effects of Utility-Scale Photovoltaics on Near-Surface Air Temperature and Energy Balance. *Journal of Applied Meteorology and Climatology*. 58. 10.1175/JAMC-D-18-0271.1.

<sup>23</sup> Barron-Gafford, G. A. et al. The Photovoltaic Heat Island Effect: Larger solar power plants increase local temperatures. *Sci. Rep.* 6, 35070; doi: 10.1038/srep35070 (2016).

<sup>24</sup> V. Fthenakis and Y. Yu, "Analysis of the potential for a heat island effect in large solar farms," 2013 IEEE 39th Photovoltaic Specialists Conference (PVSC), Tampa, FL, 2013, pp. 3362-3366, doi: 10.1109/PVSC.2013.6745171.

---

climates in the southeast. In a written statement of evidence Greg Barron-Gafford, leading solar heat island effect researcher, says that he expects that when the area under the PV array is vegetated with grass, the localized heat island effect will be greatly reduced relative to what his research found in dry climates.<sup>25</sup>

The available studies agree that the slight increase of air temperature in the PV site dissipates quickly with height and distance from the panels as natural processes remove and spread the heat. As a result, any temperature increase that may occur at the Wheelhouse Solar project during the day will be limited to the site and will not increase the temperature of any of the surrounding community.

### *Sources for Further Reading on Heat Island Effect:*

- EPA: [Learn About Heat Islands](#), (accessed September 2022)

## Glare

Photovoltaic panels are designed to absorb, and thus not reflect, the solar energy that they receive. However, when sunlight strikes the glass front of a solar panel at a glancing angle, a significant portion of the solar radiation is reflected, which can potentially lead to solar glint (a brief flash) or glare. Glint or glare can temporarily impact a person's vision, including pilots landing aircraft, or motorists driving vehicles. However, the conditions required for a PV project to create glare rarely occur.

PV facilities, such as Wheelhouse Solar, that utilize single axis trackers to slowly rotate the solar panels to follow the sun have even less potential to create glare because the trackers help avoid a situation where sunlight hits the panels at a glancing angle. Most modern trackers implement an advanced control strategy known as "backtracking" that increases the electricity production of the site by flattening the tilt of the panels early and late in the day to keep the rows of solar panels from shading one another. Backtracking can result in brief periods near sunrise and sunset where the sun strikes the panels at a glancing angle, creating a situation that could result in a few minutes of visible glare at sunrise and sunset. For anyone to see this glare they must be looking across the solar panels in the direction of the rising or setting sun, which is a situation where the sun obviously will create significant glare for the viewer with or without the solar project.



*Figure 6. 20 MW PV System at Indianapolis International Airport (Photo source: inhabitat.com)*

A clear indication of the ability to avoid glare problems from large ground-mounted PV systems are the PV systems installed on airports across the U.S., including Denver International and Indianapolis International. While there is the potential for a PV system to create glare there is also the ability to predict when and where a system may create glare and incorporate any needed mitigation before construction. The Federal Aviation Administration (FAA) and the U.S. Department of Energy developed specialized solar glare analysis software to predict when and where a PV project may produce glint or glare for sensitive receptors nearby.

The two closest airports in the National Plan of Integrated Airport Systems (NPIAS) are the Mecklenburg Brunswick Regional Airport (AVC) and the Farmville Regional Airport (FVX). The Mecklenburg Brunswick Regional Airport is about 25 miles southeast of the Wheelhouse site and the Farmville Regional Airport is about 25 miles northwest of the Wheelhouse site, so

---

<sup>25</sup> G. Barron-Gafford, Statement of Evidence by Greg Barron-Gafford on Solar Heat Islanding Issues, May 2018, [www.planning.vic.gov.au/\\_data/assets/pdf\\_file/0024/126555/301-Expert-Witness-Statement-of-G-Barron-Gafford-PVHI-May-2018-Lemnos.pdf](http://www.planning.vic.gov.au/_data/assets/pdf_file/0024/126555/301-Expert-Witness-Statement-of-G-Barron-Gafford-PVHI-May-2018-Lemnos.pdf)

both of these airports are much too far away for glare from the solar site to impact either of these airports. There is one small airport just less than 5 miles from the closest solar panel, which is the Lunenburg County Airport (W31), which could be close enough to potentially have some impact on the airport, however the airport does not have a control tower so there is no potential to impact air traffic control. In May of 2021, the FAA replaced the long-standing interim solar glare policy with a (final) policy that no longer restricts solar developed on airport property from creating glare visible to pilots, in recognition that pilots often experience glare during landing from bodies of water and that glare from solar is not meaningfully different.<sup>26</sup> The new policy does still prohibit on-airport PV systems from creating any glare visible in the air traffic control towers. So, without an air traffic control tower within the vicinity of the Wheelhouse Solar project there is no risk of the facility creating a solar glare hazard for aviation.

### *Sources for Further Reading on Solar Glare:*

- National Renewable Energy Laboratory (NREL): [Research and Analysis Demonstrate the Lack of Impacts of Glare from Photovoltaic Modules](#), July 2018
- ForgeSolar: [PV Planning and glare analysis software help documentation](#), (accessed September 2022)

## Conclusions

Based on my knowledge of engineering and science, personal experience with PV technology, review of academic research, and review of materials provided by the project developers about the proposed Wheelhouse Solar PV facility in Lunenburg County, Virginia, my opinions are summarized as follows:

- The development and operation of the Wheelhouse Solar facility will not result in any environmental contamination or negative impacts to public health or safety.
- The Wheelhouse Solar facility will not increase the temperature of the area surrounding the site.
- The Wheelhouse Solar facility is not expected to create any glare hazard for aviation or other negative glare impacts.

---

<sup>26</sup> "Federal Aviation Administration Policy: Review of Solar Energy System Projects on Federally-Obligated Airports", <https://www.federalregister.gov/documents/2021/05/11/2021-09862/federal-aviation-administration-policy-review-of-solar-energy-system-projects-on-federally-obligated>

---